

JakMat installation steps • Auckland • 2011

Contractor: Pete's Landscaping

Application: **JakMatEnviro** for a pathway between two residential townhouses and down the side of a deck to get to the rear of the property

JakMatEnviro

The flexible way to stabilise paths & tracks

Laying JakMatEnviro



Step 1: Ground prepared and leveled with Gap7 aggregate used as bedding material



Step 2: Fast and easy to lay with power or hand saws able to cut JakMatEnviro




Step 3: Approx. 60m² area of JakMatEnviro laid in 3 hours

Filling JakMatEnviro



Step 4: Irish Gold used as decorative aggregate to fill honey combed cells of JakMatEnviro

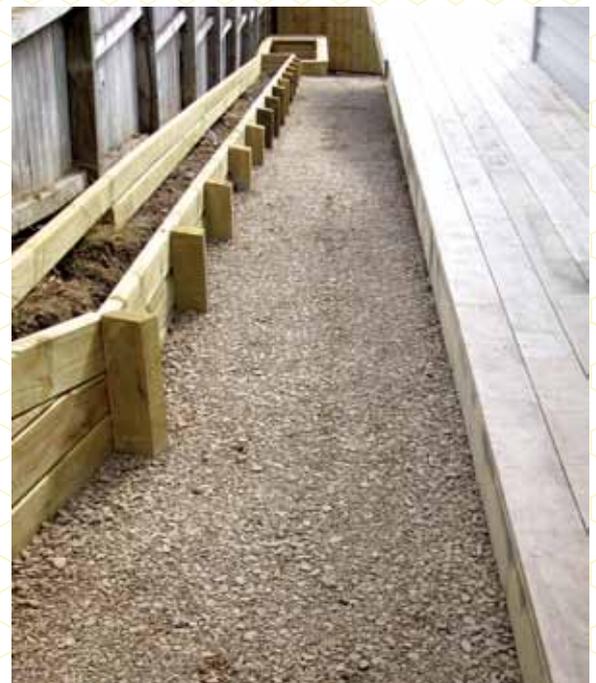

Step 5: A topping layer is recommended above the top of the JakMatEnviro, compaction is done with a plate compactor ensuring a sound and professional finish

Contractor's Comments:

"Brilliant product, very easy to use. I wouldn't go back to concrete pavers which are heavy and hard"



Jakaar
Re:Inventing Plastics

Jakaar Industries Ltd

66 Cryers Rd, Highbrook, Manukau 2013

PO Box 204069, Highbrook, Manukau 2161, Auckland, New Zealand

Tel +64 9 273 5511, Fax +64 9 273 5512

www.jakmat.co.nz

